

Model 701i/202  
Model 703i/203  
Surface Mount Speakers\*



FEATURES	GENERAL SPECS	701i/202	703i/203
<ul style="list-style-type: none"> <li>• Professional Commercial Speaker</li> <li>• <b>SELECTABLE SWITCH – 70 V and 8 <math>\Omega</math> Combination</b></li> <li>• 70 V Transformer Tap – 2.5, 5, 10, 15 W</li> <li>• Weatherized Aluminum Casing, Grill and Bracket</li> <li>• Ceiling or Wall Mount Possibilities with the Included "U" Mount Bracket</li> <li>• Black or White</li> <li>• 5 Year Warranty</li> </ul>	<p>Description: Enclosure: Outdoor Rated: Selectable Switch: 70 V Transformer Tap: Sensitivity (1W / 1M): Power handling (8 Ohm): Frequency response: Crossover: Dispersion (Horiz/Vert): Woofer Diameter: Woofer Material:</p> <p>Tweeter(s): Tweeter Size:</p> <p>Tweeter Material: Grill Material: Dimensions (HxWxD): Weight: "U" Mount Bracket: Color(s):</p>	<p>4", 2-Way Speaker Aluminum Diecast Yes 70 V and 8 <math>\Omega</math> Combination 2.5, 5, 10, 15 Watts 88 dB 80 W Max., 40 W Nom. 90 Hz - 20 kHz 6 kHz 140° 4" Paper Coated / Rubber Surround 1 ea. .5" (13 mm) Dome PEI Aluminum 7" x 4.5" x 4" 5.2 Lbs. Included Black, White</p>	<p>4", 3-Way Speaker Aluminum Diecast Yes 70 V and 8 <math>\Omega</math> Combination 2.5, 5, 10, 15 Watts 88 dB 100 W Max., 50 W Nom. 90 Hz - 20 kHz 9 kHz 140° 4" Paper Coated / Rubber Surround 2 ea. .6" (15 mm) Piezo / .5" (13 mm) Dome PEI Aluminum 4.5" x 4" x 7" 4.7 Lbs. Included Black, White</p>

\* 701i/202 Replaces Models 201, 202, 701 and 702  
703i/203 Replaces Models 203 and 703

## Model 701i/202


## Model 703i/203

### Surface Mount Speakers\*





GENERAL SPECS	701i/202	703i/203	OPTIONS AVAILABLE
Description:	4", 2-Way Speaker	4", 3-way Speaker	SS36 – 36" In-Ground Stainless Steel Stake
Enclosure:	Aluminum Diecast	Aluminum Diecast	Attenuators:
Outdoor Rated:	Yes	Yes	OWI1070M – Mono, 70 V, 10 W Max.
<b>SELECTABLE SWITCH:</b>	<b>70 V and 8 <math>\Omega</math> Combination</b>	<b>70 V and 8 <math>\Omega</math> Combination</b>	OWI3570M – Mono, 70V, 35 W Max.
70 V Transformer Tap:	2.5, 5, 10, 15 Watts	2.5, 5, 10, 15 Watts	OWI7570M – Mono, 70 V, 75 W Max.
Sensitivity (1W / 1M):	88 dB	88 dB	OWI2570S – Stereo, 70 V, 25 W Max.
Power handling (8 Ohm):	80 W Max., 40 W Nom.	100 W Max., 50 W Nom.	Voume Controls:
Frequency response:	90 Hz - 20 kHz	90 Hz - 20 kHz	25WPVC – 25W, Waterproof,
Crossover:	6 kHz	9 kHz	Impedance Matching
Dispersion (Horiz/Vert):	140°	140°	72WPVC – 72 W, Waterproof,
Woofer Diameter:	4"	4"	Impedance Matching
Woofer Material:	Paper Coated / Rubber Surround	Paper Coated / Rubber Surround	
Tweeter(s):	1 ea.	2 ea.	Engineered in the USA
Tweeter Size:	.5" (13 mm) Dome	.6" (15 mm) Piezo / .5" (13 mm) Dome	Made in China
Tweeter Material:	PEI	PEI	
Grill Material:	Aluminum	Aluminum	
Dimensions (HxWxD):	7" x 4.5" x 4"	4.5" x 4" x 7"	* 701i/202 Replaces Models 201, 202, 701 and 702
Weight:	5.2 Lbs.	4.7 Lbs.	703i/203 Replaces Models 203 and 703
"U" Mount Bracket:	Included	Included	
Color(s):	Black, White	Black, White	
Warranty:	5 Years	5 Years	

### POLAR CHARTS

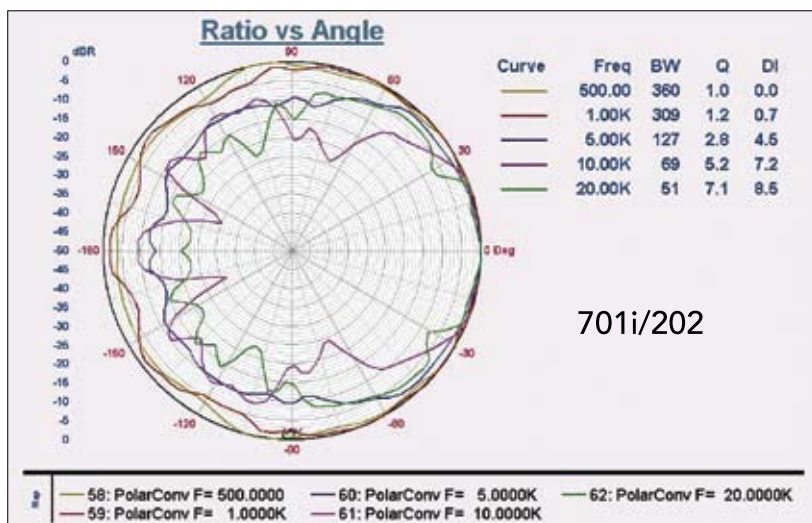

### FREQUENCY RESPONSE CHARTS

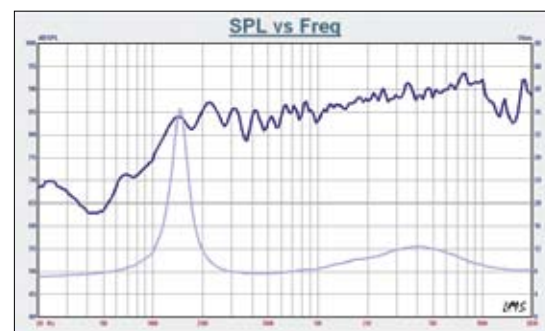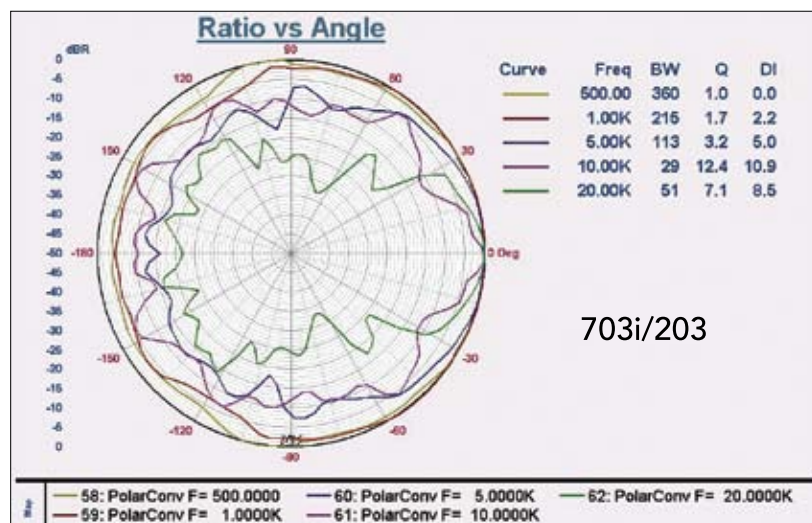

### OWI, Inc.

17141 Kingsview Ave.  
Carson, CA 90746 USA

ph. 310.515.1900

toll free 800.638.1694

fax 310.515.1606

email info@owi-inc.com

web www.owi-inc.com